

# Service valve

## Pre-meter valve with hand wheel

### Construction characteristics

- Resilient seated gate valve with smooth straight through bore with internal threads on both sides
- Not suitable for underground installation
- Housed between the body and bonnet lies the bonnet seal
- All surfaces in contact with drinking water correspond to the hygiene requirements acc. to ÖNORM B 5014/Part 1 (KTW guidelines); the valve plug is drained; there is no valve bag, the internal surfaces allow no deposits

No. KR352



### Material | Technical features


- 1/2 **Body (1), bonnet (2)**  
DN 20 – DN 25 made of forged brass
- 3 **Valve plug** made of brass, with vulcanised elastomer
- 4 **Stainless steel spindle** with rolled thread guided in brass  
O-ring bush and triple sealed with O-rings
- 5 **O-rings** made of elastomer
- 6 **O-ring bush** made of brass
- 7 **Hand wheel** made of plastic (optional of aluminium)



### Suitable accessories

**Installation bracket:** No. KR331

Order no.	Version	MOP (PN)	Dimensions / DN	
			3/4"	1"
KR352	internal thread on both sides	16		

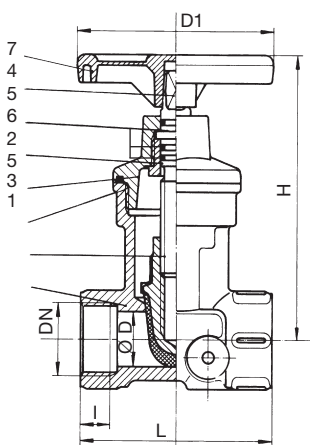

DN	Valve				Weight
	L	H	D1	I	
3/4"	90	125	90	12	1,65
1"				14	