

Fittings

Design features

- According to EN 545
- Working pressure MOP (PN) 16
- Made of ductile iron, epoxy powder coated
- Flange size according to EN 1092-2 | PN 16
- Standard drilling to EN 1092-2 | PN 10

DN	DN 1	L	Weight
65	50	200	9,0
80	50	200	7,4
	65	200	8,2
100	50	200	8,1
	65	200	8,8
	80	200	9,5
125	65	200	19,0
	80	200	10,7
	100	200	11,4
150	80	200	12,2
	100	200	16,7
	125	200	14,1
200*	100	300	18,6
	125	300	20,0
	150	300	22,0
250	100	300	22,0
	150	300	27,0
	200*	300	30,5
250*	125	300	41,0
	100	300	35,0
300	150*	300	37,0
	200*	300	35,5
	250*	300	41,0
350	300	300	64,0
400	350*	300	81,0
500	300	600	110,0
	400	600	129,0


Design features

- According to EN 545
- Working pressure MOP (PN) 16
- Made of ductile iron, epoxy powder coated
- Flange size according to EN 1092-2 | PN 16
- Standard drilling to EN 1092-2 | PN 10

DN	b	Weight
50	150	9,0
65	165	12,0
80	130	9,5
100	140	11,5
125	150	14,6
150	160	18,7
200*	180	27,5
250	350	80,0
300	400	112,0

Double flanged taper

FFR piece
No. 8550

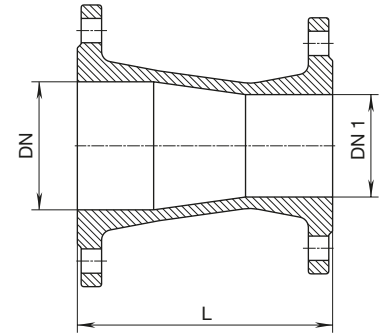


* Also available drilled to EN 1092-2 | PN 16
(Please specify on order)

* Only PN 16 available

Double flanged elbows 45°

45° FFK piece
No. 8540

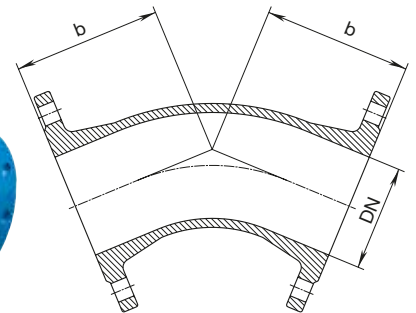

* Also available drilled to EN 1092-2 | PN 16
(Please specify on order)