

Fittings

Design features

- According to EN 545
- Working pressure MOP (PN) 16
- Made of ductile iron, epoxy powder coated
- Flange size according to EN 1092-2 | PN 16
- Standard drilling to EN 1092-2 | PN 10

DN	b	c	Weight
50	150	95	8,4
80	165	110	13,4
100	180	125	16,8
150	220	160	29,5
200	260	190	46,0

Design features

- Working pressure MOP (PN) 16
- Made of ductile iron, epoxy powder coated
- Flange size according to EN 1092-2 | PN 16
- Standard drilling to EN 1092-2 | PN 10

DN	b	Length (b1)	c	Weight
80	165	365	110	17,8

Design features


- Working pressure MOP (PN) 16
- Made of ductile iron, epoxy powder coated
- Flange size according to EN 1092-2 | PN 16
- Standard drilling to EN 1092-2 | PN 10

DN	a	b	c	d	Weight
80	260	165	110	90	16,5
100	280	180	125	110	19,5

Double flanged duck foot bend 90°

N-pieces

No. 5049

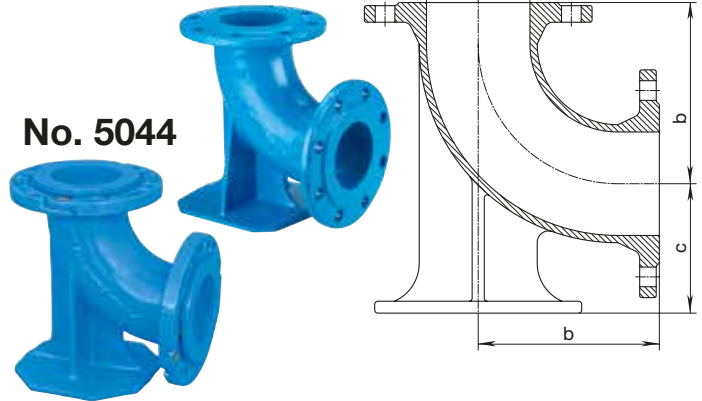


No. 5044

DN 80 and DN 100 also available with loose flange No. 5044

Double flanged duck foot bend long

N-pieces

No. 5049L

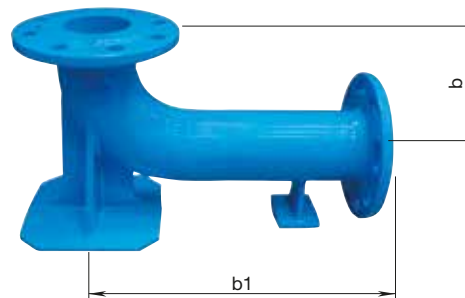

Flanged duck foot bend with PVC socket 90°

EN-KS-pieces

No. 5046

