

# BAIO - Fittings

## Without gaskets

### Design features

- BAIO spigot / BAIO spigot

DN	MOP (PN)	L	L1	Weight
80	16	215	45	3,70
80		500	330	8,00
100		255	45	5,00
100		500	290	11,00
150		270	50	8,60
200		280	50	14,10
250		400	73	26,50
300		425	72	36,00


### BAIO S piece (spigot piece) No. NL46



### Design features

- BAIO socket / BAIO socket / BAIO spigot
- Assembly of below-ground hydrant in the pipe section

DN	DN1	MOP (PN)	L	E	E1	Weight
100	80	16	850	120	105	24,30
150	80			125	105	35,00
200	80			145	105	47,00

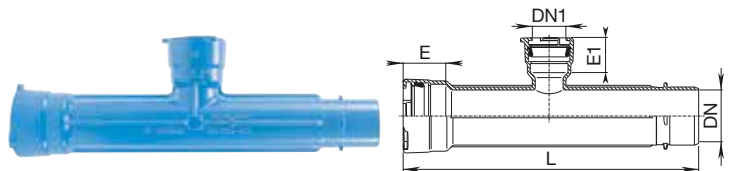

### Design features

- Flange / BAIO socket
- Flange according to EN 1092-2, drilled according to EN 1092-2 | PN 10; EN 1092-2 | PN 16; DN 200 please specify on order - other standards on request

DN	Flange DN	MOP (PN)	L	E	Weight
80	80	16	170	155	7,70
100	100		175	160	9,10
100	150		175	160	12,00
125	125		180	165	11,60
150	150		180	165	13,20
200	200		185	170	19,10



### Design features

- Flange / BAIO spigot
- Flange according to EN 1092-2, drilled according to EN 1092-2 | PN 10; EN 1092-2 | PN 16; DN 200 please specify on order - other standards on request

DN	Flange DN	MOP (PN)	L	Weight
80	80	16	145	5,90
100	100		165	7,00
150	150		155	10,50
200	200		190	16,00

### BAIO F piece (flange-spigot piece) No. NL41

