


Hawle - SYNOFLEX

łącznik



Łącznik SYNOFLEX Nr kat. 7974

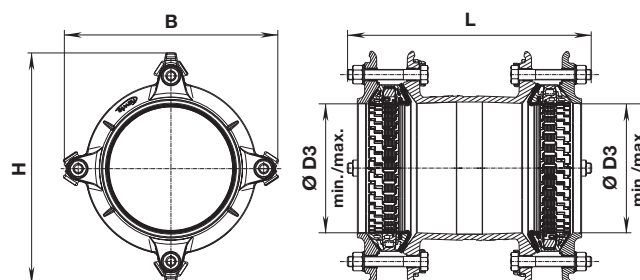

Przykład zabudowy



Kielich 1 DN	Kielich 2 DN	PN	Kielich 1				Kielich 2				L	Masa kg
			B	H	Rura Ø D3 min./max.	Śruby	B	H	Rura Ø D3 min./max.	Śruby		
40	40	16	130	157	46 - 58	3 x M 12-80	130	157	46 - 58	3 x M 12-80	243	3,9
50	50		141	170	56 - 71	3 x M 12-80	141	170	56 - 71	3 x M 12-80	254	4,9
65	65		156	187	71 - 88	3 x M 12-80	156	187	71 - 88	3 x M 12-80	264	5,6
80	65		171	204	85 - 105	3 x M 12-80	156	187	71 - 88	3 x M 12-80	274	6,6
80	80		171	204	85 - 105	3 x M 12-80	171	204	85 - 105	3 x M 12-80	270	6,9
100	80		226	260	104 - 132	3 x M 16-100	171	204	85 - 105	3 x M 12-80	312	9,7
100	100		226	260	104 - 132	3 x M 16-100	226	260	104 - 132	3 x M 16-100	332	12,5
125	100		250	290	131 - 160	3 x M 16-110	226	260	104 - 132	3 x M 16-100	355	14,3
125	125		250	290	131 - 160	3 x M 16-110	250	290	131 - 160	3 x M 16-110	357	14,9
150	100		315	350	155 - 192	4 x M 16-110	226	260	104 - 132	3 x M 16-100	361	16,7
150	125		315	350	155 - 192	4 x M 16-110	250	290	131 - 160	3 x M 16-110	375	17,4
150	150		315	350	155 - 192	4 x M 16-110	315	350	155 - 192	4 x M 16-110	367	19,3
200	150		326	371	198 - 230	6 x M 16-120	315	350	155 - 192	4 x M 16-110	431	41,8
200	200		326	371	198 - 230	6 x M 16-120	326	371	198 - 230	6 x M 16-120	406	30,2
225	200		361	410	230 - 260	6 x M 20-130	326	371	198 - 230	6 x M 16-120	450	61,3
225	225		361	410	230 - 260	6 x M 20-130	361	410	230 - 260	6 x M 20-130	429	41,0
250	200		408	464	265 - 310	6 x M 20-130	326	371	198 - 230	6 x M 16-120	468	42,4
250	225		408	464	265-310	6 x M 20-130	361	410	230-260	6 x M 16-120	454	50,2
250	250		408	464	265 - 310	6 x M 20-130	408	464	265 - 310	6 x M 20-130	441	48,6
300	250		510	510	313-356	8 x M 20-130	408	464	265-310	6 x M 20-130	473	61,4
300	300	510	510	313 - 356	8 x M 20-130	510	510	313 - 356	8 x M 20-130	460	60,0	
350	350	10	550	550	352 - 396	12 x M 20-130	550	550	352 - 396	12 x M 20-130	502	82,6
400	350		596	596	398 - 442	12 x M 20-130	550	550	352 - 396	12 x M 20-130	526	90,0
400	400		596	596	398 - 442	12 x M 20-130	596	596	398 - 442	12 x M 20-130	523	95,4