


# Złączki rurowe HAWLE-FIT do rur PE

Nr kat.	Rura Ø mm	PN	L	E	ØD	Masa kg
6420HF	25	16	94	74	54	0,18
	32		105	80	61	0,26
	40		121	81	75	0,43
	50		136	103	90	0,63
	63		159	115	105	0,91

**Nr kat. 6420HF**  
Kolano 90°

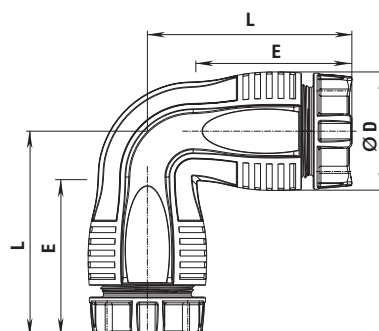


## Cechy konstrukcyjne

- Z gwintem wewnętrznym zgodnie z EN ISO 228

Nr kat.	Rura Ø mm	Gwint	PN	L	E	ØD	Masa kg
6430HF	25	¾"	16	94	74	54	0,12
	32	1"		105	80	61	0,18
	40	1¼"		121	81	75	0,28
	50	1½"		137	103	90	0,44
	63	2"		159	115	105	0,62

**Nr kat. 6430HF**

Kolano 90° z gwintem wewnętrznym



## Cechy konstrukcyjne

- Z gwintem wewnętrznym zgodnie z EN ISO 228

Nr kat.	Rura Ø mm	Gwint	PN	L	E	ØD	Masa kg
6520HF	25	¾"	16	173	74	54	0,20
	32	1"		191	80	61	0,27
	40	1¼"		214	81	75	0,44
	50	1½"		240	103	90	0,65
	63	2"		291	115	105	0,99

**Nr kat. 6520HF**

Trójnik z odejściem gwintowanym

