

# E2 VRS-SOCKET VALVE

For cast iron pipes and pipes with VRS-socket, PN 16



## Design features

- Resilient seated gate valve with one-sided VRS-socket and one-sided VRS-spigot
- With VRS grip ring and VRS pipe restraint clamp (not included), a pipe connection can be made restraint
- Suitable for cleaning with a cleaning pig
- One extension spindle for several dimensions
- Suitable for operation by automatic actuators
- Easy refitting for position indicator and automatic actuators on the standard bonnet (DN 50 to DN 200)  
To set-up an actuator or a position indicator, remove the centering flange and insert position indicator or actuator with adapter (DN 250 to DN 300)
- Duplex stainless steel spindle

**Standard version:** without handwheel and extension spindle

## Material | technical features


- 1 **Socket sealing** made of elastomer
- 2 **Pipe restraint clamp** (not included)

## Suitable accessories

**Suitable accessories:** see page A 1/2

Handwheel:		No. 7800
Extension spindles:	rigid	No. 9000E2
	telescopic	No. 9500E2
Surface boxes:	rigid	No. 1750
	telescopic	No. 2050, No. 2051K
Valve actuator:		No. 9920
Adapter for actuator (E2 adapter):		No. 8630E2
Base plate:	No. 3481, No. 3482	
Operating cap:	No. 2156, No. 2157, No. 2158	
Extension spindle:	No. 7820, No. 7825	
Position indicator:	No. 2170E2	
HAWAK-pillar:	No. 9894, No. 9895	

## No. 4027E2

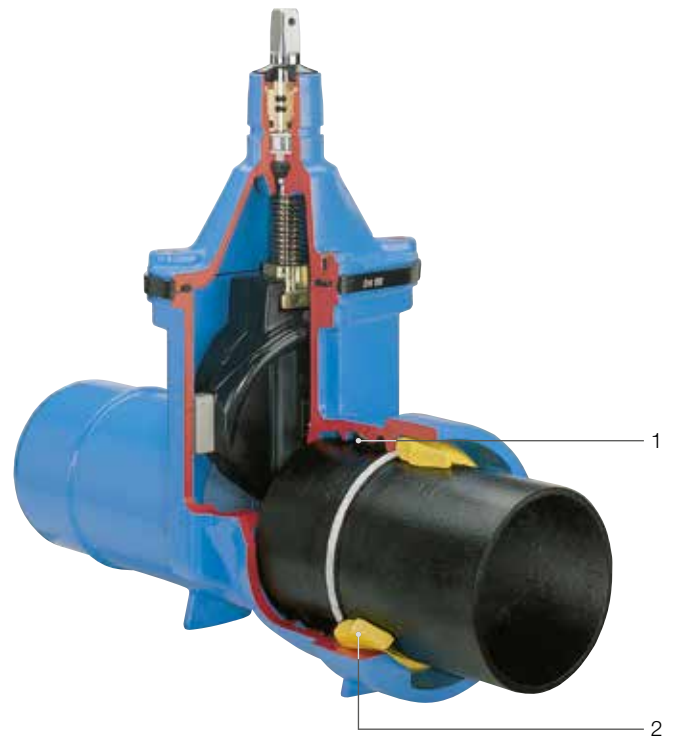

Order no.	Version	MOP (PN)	Dimensions/DN						
			80	100	125	150	200	250	300
4027E2	Socket-Spigot	16							

## Application example



**E. Hawle Armaturenwerke GmbH** 4840 Vöcklabruck - Austria - Wagrainstraße 13  
Tel.: +43 (0) 7672 72576 0 - Fax: +43 (0) 7672 78464 - E-Mail: hawle@hawle.at - hawle.com


**A 5/1**

# E2 VRS-SOCKET VALVE

For cast iron pipes and pipes with VRS-socket, PN 16



No. 4027E2

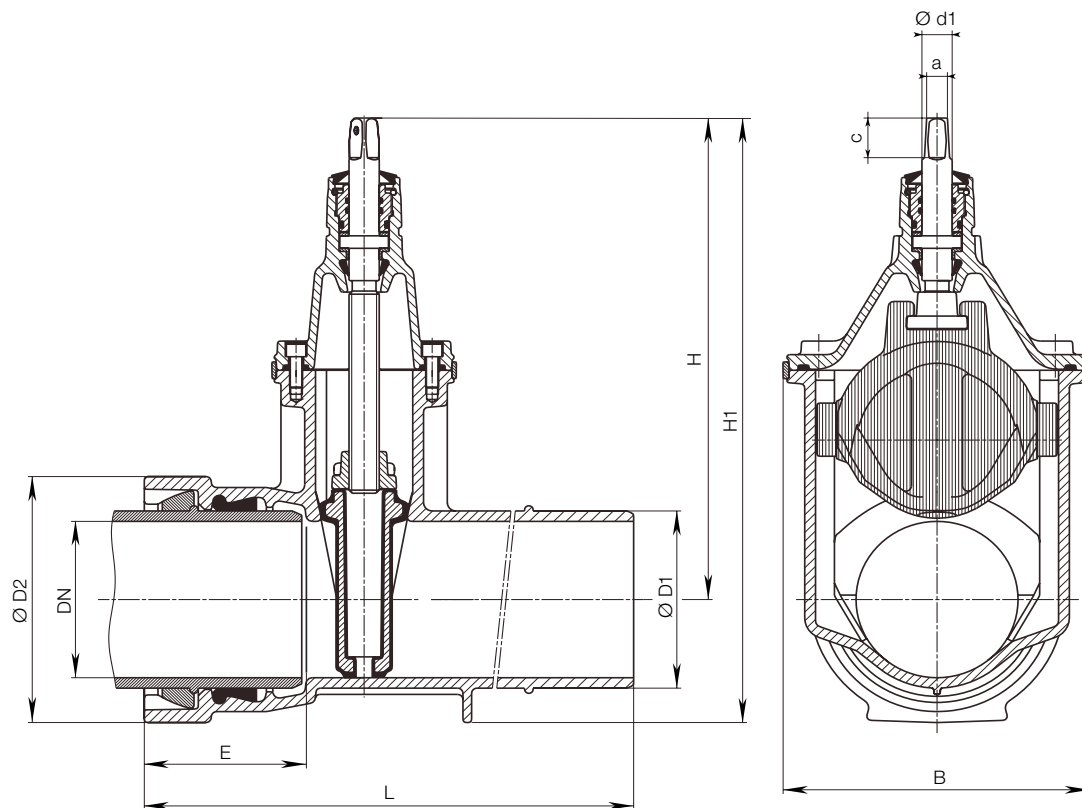

DN	Ø Pipe	MOP (PN)	Valve							Spindle			Weight
			Ø D1	Ø D2	E	H	H1	L	B	a	c	Ø d1	
80	98	16	98	156	127	336	414	422	180	17,3	35	25	20,0
100	118		118	178	135	373	462	440	213	19,3	38	25	28,0
125	144		144	208	143	450	554	494	285	19,3	38	25	35,0
150	170		170	235	150	462	580	513	285	19,3	38	28	46,0
200	222		222	295	160	563	711	535	357	24,3	48	32	74,5
250	274		274	356	165	670	848	577	432	27,3	48	36	115,0
300	326		326	414	170	753	960	638	518	27,3	48	36	170,0

A 5/2



E. Hawle Armaturenwerke GmbH 4840 Vöcklabruck - Austria - Wagrainner Straße 13  
 Tel.: +43 (0) 7672 72576 0 - Fax: +43 (0) 7672 78464 - E-Mail: hawle@hawle.at - hawle.com