

# ISO-ROHR-FITTINGS

## für PE-Rohre



### Konstruktionsmerkmal

- Mit Außengewinde nach EN 10226-1

Best.-Nr.	Ø Rohr	Gewinde	MOP (PN)	L	E	Ø D	Gewicht
6100	32	1"	16	95	70	53	0,35
	40	1¼"		112	84	65	0,63
	50	1½"		130	101	76	0,90
	63	2"		148	114	94	1,45


Best.-Nr.	Ø Rohr	Gewinde	MOP (PN)	L	E	Ø D	Gewicht
6110	32	1¼"	16	96	70	53	0,39
	32	1½"		96	70	53	0,60
	32	2"		112	70	62	0,63
	40	1"		112	84	65	0,65
	40	1½"		112	84	65	0,64
	40	2"		113	84	65	0,72
	50	1¼"		130	101	76	0,90
	50	2"		130	101	76	0,95
	63	1¼"		148	114	93	1,50
	63	1½"		148	114	93	1,45
	75	2"		152	109	111	2,41

### Außengewinde

Nr. 6100 aus Sphäroguss

Außengewinde reduziert

Nr. 6110 aus Sphäroguss

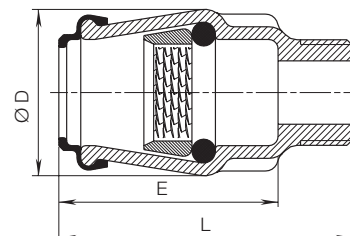

### Konstruktionsmerkmal

- Mit Innengewinde nach ISO 228

Best.-Nr.	Ø Rohr	Gewinde	MOP (PN)	L	E	Ø D	Gewicht
6200	32	1"	16	91	70	55	0,42
	40	1¼"		108	84	65	0,70
	50	1½"		125	99	76	1,00
	63	2"		144	110	94	1,70
	75	2½"		144	110	110	3,20
	90	3"		144	110	126	3,60


Best.-Nr.	Ø Rohr	Gewinde	MOP (PN)	L	E	Ø D	Gewicht
6210	32	1¼"	16	96	70	65	0,57
	50	1¼"		125	99	76	1,10
	90	2"		144	110	126	4,00

### Innengewinde

Nr. 6200 aus Sphäroguss

Innengewinde reduziert


Nr. 6210 aus Sphäroguss

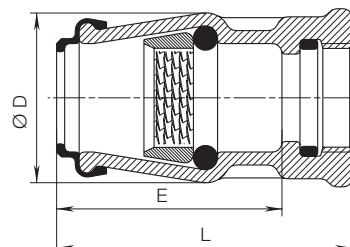

Best.-Nr.	Ø Rohr	MOP (PN)	L	E	Ø D	Gewicht
6300	32	16	144	70	53	0,65
	40		172	84	65	0,97
	50		206	101	76	1,45
	63		232	114	94	2,70
	75		221	109	106	3,20
	90		195	109	126	4,70

### Verbinder

Nr. 6300 aus Sphäroguss

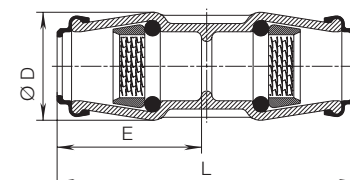

E. Hawle Armaturenwerke GmbH 4840 Vöcklabruck - Austria - Wagrainstraße 13  
 Tel.: +43 (0) 7672 72576 0 - Fax: +43 (0) 7672 78464 - E-Mail: hawle@hawle.at - www.hawle.com

J 3/3